

SKF High performance, high temperature bearing grease

LGHP 2

SKF LGHP 2 is a premium quality mineral oil based grease, using a modern Polyurea (di-urea) thickener. It is suitable for electric motors and similar applications.

- Extremely long life at high temperatures
- Wide temperature range
- Excellent corrosion protection
- High thermal and mechanical stability
- Good start-up performance at low temperatures
- Compatibility with common polyurea and lithium thickened greases
- Low noise properties

Typical applications

- Electric motors: Small, medium and large
- Industrial fans, including high speed fans
- Water pumps
- Rolling bearings in textile, paper processing and drying machines
- Applications with medium and high speed ball (and roller) bearings operating at medium and high temperatures
- Clutch release bearings
- Vertical shaft applications
- Kiln trucks and rollers



Available pack sizes

Packsize	Designation	Packsize	Designation
420 ml cartridge	LGHP 2/0.4	Electro-mechanical lubricators	
1 kg can	LGHP 2/1	TLSD series 125 ml	TLSD 125/HP2
5 kg can	LGHP 2/5	TLSD series 125 ml refill	LGHP 2/SD125
18 kg pail	LGHP 2/18	TLSD series 250 ml	TLSD 250/HP2
50 kg drum	LGHP 2/50	TLSD series 250 ml refill	LGHP 2/SD250
180 kg drum	LGHP 2/180	Electro-mechanical lubricant dispensers	
Gas driven lubricators		TLMR 101 series 380 ml refill (incl. battery)	LGHP 2/MR380B
LAGD series 60 ml	LAGD 60/HP2	TLMR 201 series 380 ml refill	LGHP 2/MR380
LAGD series 125 ml	LAGD 125/HP2		




Technical data			
Designation	LGHP 2/(pack size)		
DIN 51825 code	K2N-40	Corrosion protection	
NLGI consistency class	2-3	Emcor: – standard ISO 11007	0-0
Thickener	Di-urea	– water washout test	0-0
Colour	Blue	– salt water test (100% seawater)	0-0
Base oil type	Mineral	Water resistance	
Operating temperature range	-40 to +150 °C (-40 to +300 °F)	DIN 51 807/1, 3 hrs at 90 °C	1 max.
Dropping point DIN ISO 2176	>240 °C (>465 °F)	Oil separation	
Base oil viscosity		DIN 51 817, 7 days at 40 °C, static, %	1-5 ¹⁾
40 °C, mm ² /s	96	Lubrication ability	
100 °C, mm ² /s	10,5	R2F, running test B at 120 °C	Pass
Penetration DIN ISO 2137		Copper corrosion	
60 strokes, 10 ⁻¹ mm	245-275	DIN 51 811	1 max. at 150 °C (300 °F)
100 000 strokes, 10 ⁻¹ mm	365 max.	Rolling bearing grease life	
Mechanical stability		ROF test	1 000 min.
Roll stability, 50 hrs at 80 °C, 10 ⁻¹ mm	365 max.	L ₅₀ life at 10 000 r/min., hrs	at 150 °C (300 °F)
		Fretting corrosion	
		ASTM D4170 (mg)	7 ¹⁾

¹⁾ Typical value

Lubrication management

Just as asset management takes maintenance to a higher level, a lubrication management approach allows lubrication to be seen from a wider point of view. This approach helps to effectively increase machine reliability at a lower overall cost.

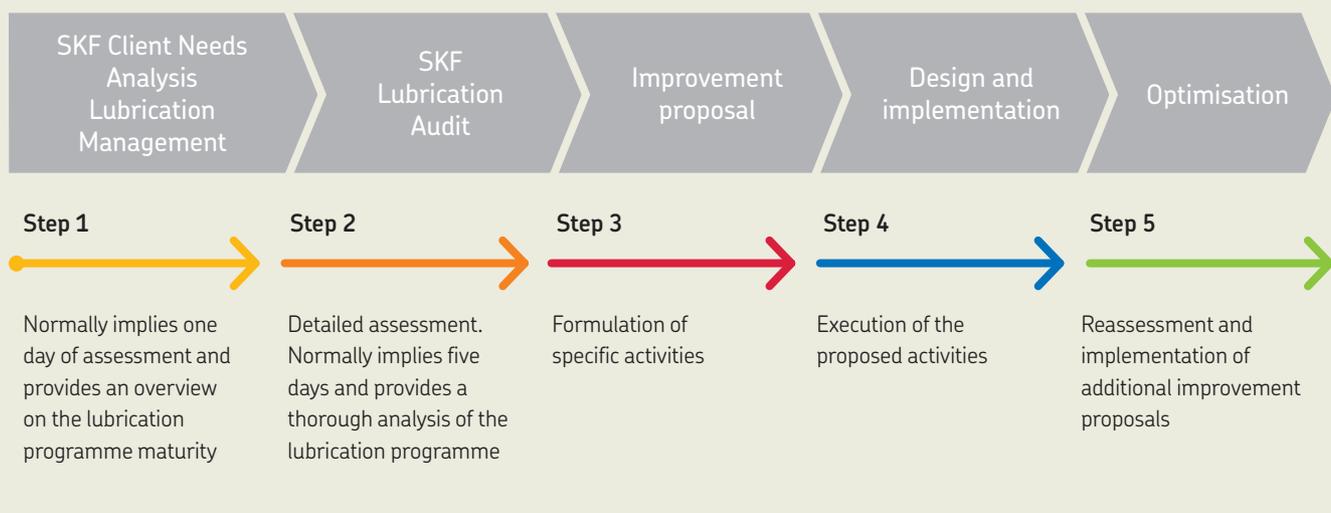

skf.com | mapro.skf.com | skf.com/lubrication

© SKF is a registered trademark of the SKF Group.

© SKF Group 2017

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 12051/2 EN · June 2017

Certain image(s) used under license from Shutterstock.com.